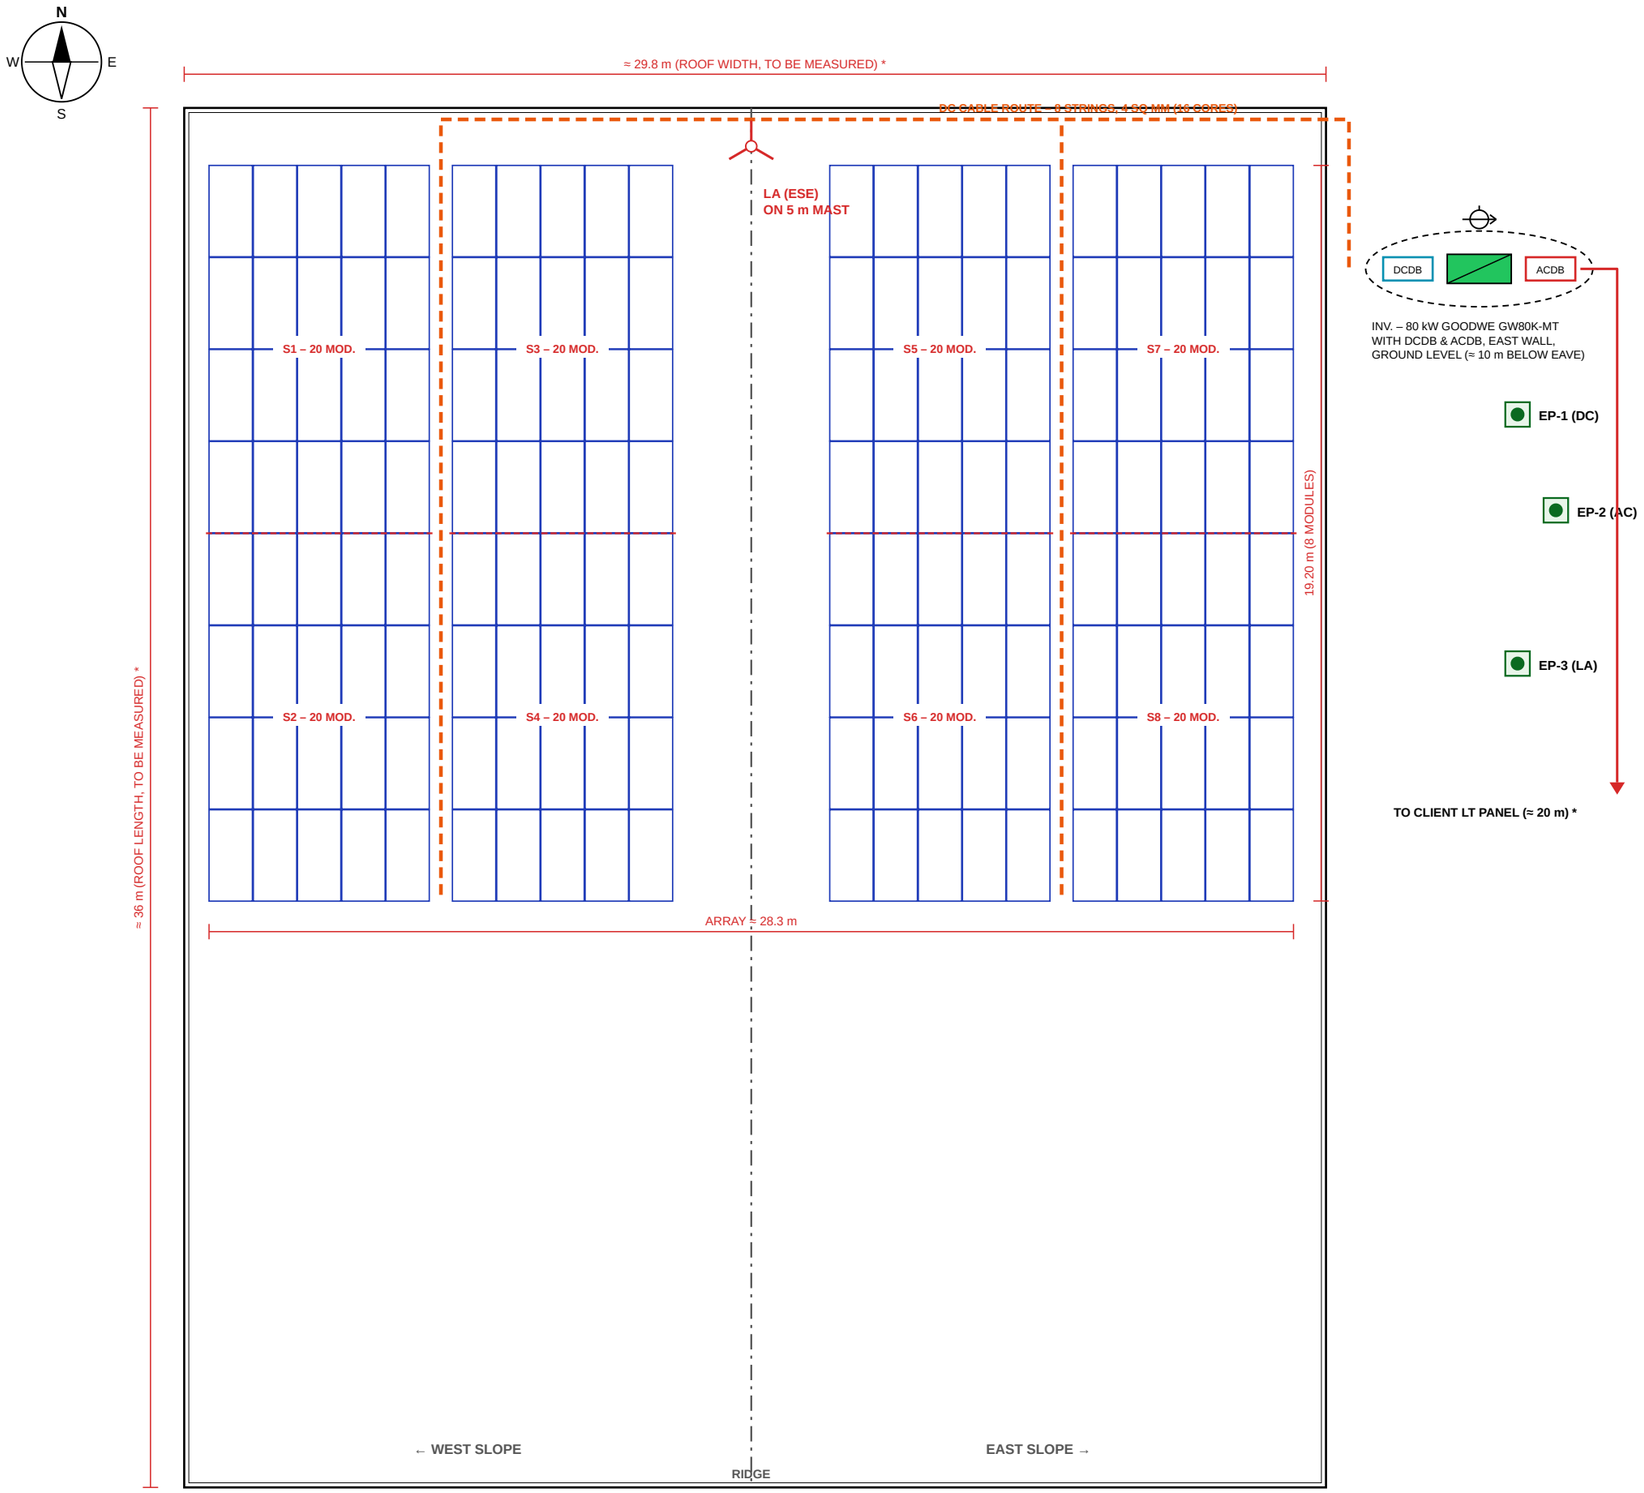

NOTE: ROOF SIZE, BLOCK POSITIONS AND EQUIPMENT LOCATIONS ARE SCALED FROM THE CLIENT LAYOUT IMAGE (*) — VERIFY ON SITE.
BLOCKS 1 & 2 ON WEST SLOPE, BLOCKS 3 & 4 ON EAST SLOPE. EACH BLOCK = 5 x 8 MODULES (PORTRAIT) = 2 STRINGS OF 20.

LEGENDS

	SOLAR MODULES
	STRING INVERTER
ACDB	AC DISTRIBUTION BOX
DCDB	DC DISTRIBUTION BOX
	LIGHTNING ARRESTER
	FIRE-EXTINGUISHER
	EARTHING PIT
	DC CABLE ROUTE
	ROOF RIDGE
	STRING BOUNDARY

SYSTEM DESCRIPTION

SITE LOCATION	— (LAT, LONG TO BE ADDED)
DC CAPACITY	100.00 kWp
TOTAL PLANT CAPACITY (AC)	80 kW
DC / AC RATIO	1.25
MODULE CAPACITY	625 Wp (ADANI N-TOPCon)
MODULE DIMENSION (L X W X H)	2382 X 1134 X 30 mm *
TOTAL PV MODULES	160 Nos.
INVERTER CAPACITY	80 kW (GOODWE GW80K-MT) 1 No.
AZIMUTH / TILT	EAST-WEST (90° / 270°), ROOF SLOPE

CUSTOMER SIGN AND STAMP:

REV.	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
R0	27-10-26	FIRST ISSUE			

CLIENT:	**JAIN GRANITE & MARBLE**
EPC CONTRACTOR:	**NRG TECHNOLOGISTS PVT LTD** 989/6, GIDC Makarpura, Vadodara
DESIGN BY:	**NRG TECHNOLOGISTS PVT LTD** 989/6, GIDC Makarpura, Vadodara

DRAWING NO.: 02

DRAWING NAME: **EQUIPMENT LAYOUT**

PROJECT TITLE: 100.00 kWp (DC)_ROOFTOP SOLAR PLANT

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ REVISION ☐ FABRICATION ☐ CONSTRUCTION ■ APPROVAL

SCALE: **1:160 (A3)**

DESIGN BY	DRAWN BY	CHECKED BY	APPROVED BY	PAPER SIZE	SHEET NO.
27-10-26	27-10-26	27-10-26	27-10-26	**A3**	**01 OF 01**