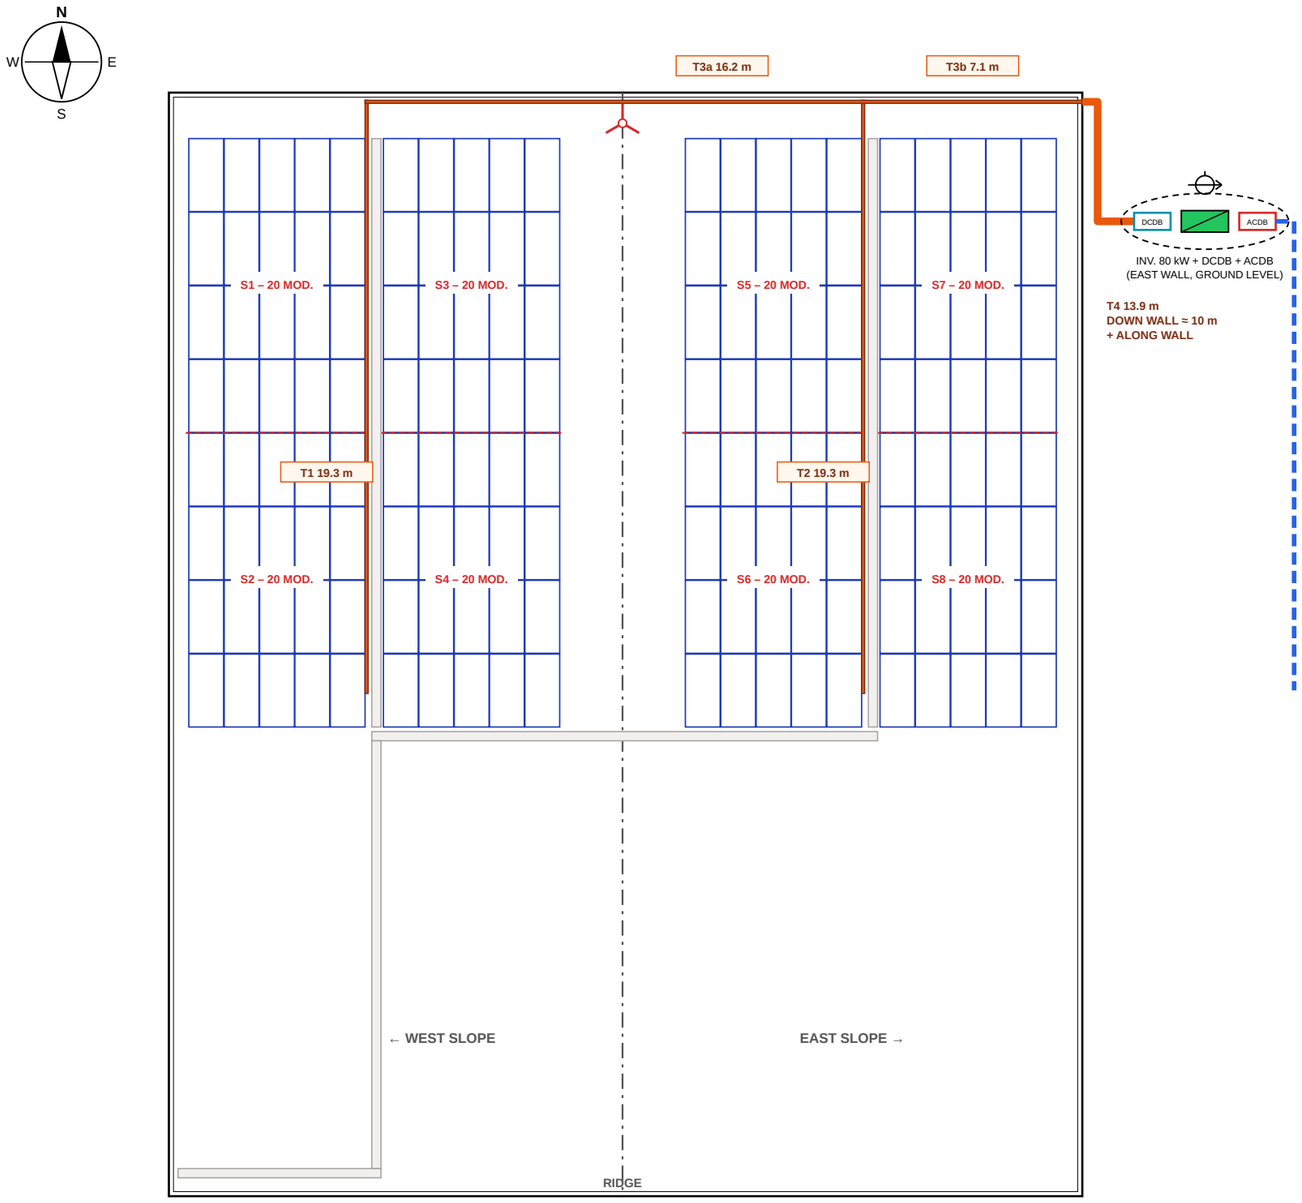

CABLE TRAY SCHEDULE (DC)

ID	ROUTE	LENGTH	CABLES IN TRAY
T1	GAP BLOCK 1/2: ROW 8 → NORTH EDGE	19.3 m	8 x 4 SQ MM + 16 SQ MM E (S1–S4)
T2	GAP BLOCK 3/4: ROW 8 → NORTH EDGE	19.3 m	8 x 4 SQ MM + 16 SQ MM E (S5–S8)
T3a	NORTH EDGE: T1 → T2 (OVER RIDGE)	16.2 m	8 x 4 SQ MM + 16 SQ MM E (S1–S4)
T3b	NORTH EDGE: T2 → EAST EAVE	7.1 m	16 x 4 SQ MM + 16 SQ MM E (ALL 8 STRINGS)
T4	EAST WALL: DOWN 10 m + ALONG TO INVERTER	13.9 m	16 x 4 SQ MM + 16 SQ MM E (ALL 8 STRINGS)
	TOTAL DC TRAY 100 x 50 MM	75.9 m	
	ORDER (+10 %), 2.5 m LENGTHS	83 m	34 LENGTHS + COVERS

TRAY SECTION (T3b / T4, FULL LOAD)

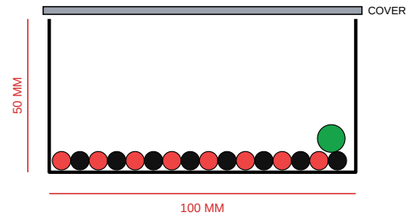

16 x 4 SQ MM DC (Ø ≈ 6 MM; RED +VE, BLACK –VE)
+ 1 x 16 SQ MM Cu EARTH (GREEN)
FILL ≈ 520 / 5,000 MM² ≈ 10 % (LIMIT 40 %)
SINGLE LAYER, ROOM FOR EXPANSION

CABLE TRAY NOTES

1. 100 x 50 MM PERFORATED HDG TRAY, 1.6 MM, WITH BOLTED COVER (UV & BIRD / MONKEY PROTECTION).
2. ONE SIZE THROUGHOUT — T1 / T2 / T3a CARRY 8 CORES, BUT ONE SIZE KEEPS FITTINGS COMMON.
3. RAISE TRAY 75–100 MM ABOVE SHEET ON PURLIN CLAMPS EVERY 1.5 m; WALL BRACKETS EVERY 1.2 m.
4. FITTINGS: 1 FLAT BEND, 1 TEE, 2 VERTICAL BENDS, COUPLERS AT EVERY JOINT, 2 END CAPS.
5. BOND TRAY SECTIONS TOGETHER AND TO EP-1.
6. AC CABLE IN ITS OWN TRAY / TRENCH, ≥ 300 MM FROM DC.
7. LA DOWN CONDUCTOR NEVER IN OR ON THE TRAY.

NOTE: TRAYS T1 / T2 SIT IN THE ≈ 0.6 m GAPS BESIDE WALKWAYS W1 / W2. TRAYS RUN NORTH, WALKWAY CONNECTOR RUNS SOUTH — NO CROSSINGS. STRING LEADS DROP INTO THE TRAY AT ROWS 1, 4, 5 AND 8 (SEE STRINGING PLAN v11). GAPS AND ROOF SIZE SCALED FROM THE LAYOUT IMAGE (*) — VERIFY ON SITE.
LA DOWN CONDUCTOR CROSSES T3a ONCE, AT 90°, RAISED ≥ 0.5 m ON AN INSULATED STAND-OFF, THEN RUNS ≥ 1 m NORTH OF THE TRAY (SEE SHEET 03).

LEGENDS

	SOLAR MODULES
	DC CABLE TRAY 100 x 50 MM
	AC CABLE ROUTE (95 SQ MM AL)
	WALKWAY (SEE SHEET 04)
	LIGHTNING ARRESTER
	STRING INVERTER

SYSTEM DESCRIPTION

SITE LOCATION	— (LAT, LONG TO BE ADDED)
DC CAPACITY	100.00 kWp
TOTAL PLANT CAPACITY (AC)	80 kW
DC / AC RATIO	1.25
MODULE CAPACITY	625 Wp (ADANI N-TOPCon)
MODULE DIMENSION (L X W X H)	2382 X 1134 X 30 mm *
TOTAL PV MODULES	160 Nos.
INVERTER CAPACITY	80 kW (GOODWE GW80K-MT) 1 No.
AZIMUTH / TILT	EAST-WEST (90° / 270°), ROOF SLOPE

CUSTOMER SIGN AND STAMP:

REV.	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
R0	27-10-26	FIRST ISSUE			

CLIENT: **JAIN GRANITE & MARBLE**

EPC CONTRACTOR: **NRG TECHNOLOGISTS PVT LTD**
989/6, GIDC Makarpura, Vadodara

DESIGN BY: **NRG TECHNOLOGISTS PVT LTD**
989/6, GIDC Makarpura, Vadodara

DRAWING NO.: 05

DRAWING NAME: **CABLE TRAY LAYOUT**

PROJECT TITLE: 100.00 kWp (DC)_ROOFTOP SOLAR PLANT

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ REVISION ☐ FABRICATION ☐ CONSTRUCTION ■ APPROVAL

SCALE: **1:200 (A3)**

DESIGN BY	DRAWN BY	CHECKED BY	APPROVED BY	PAPER SIZE	SHEET NO.
27-10-26	27-10-26	27-10-26	27-10-26	**A3**	**01 OF 01**