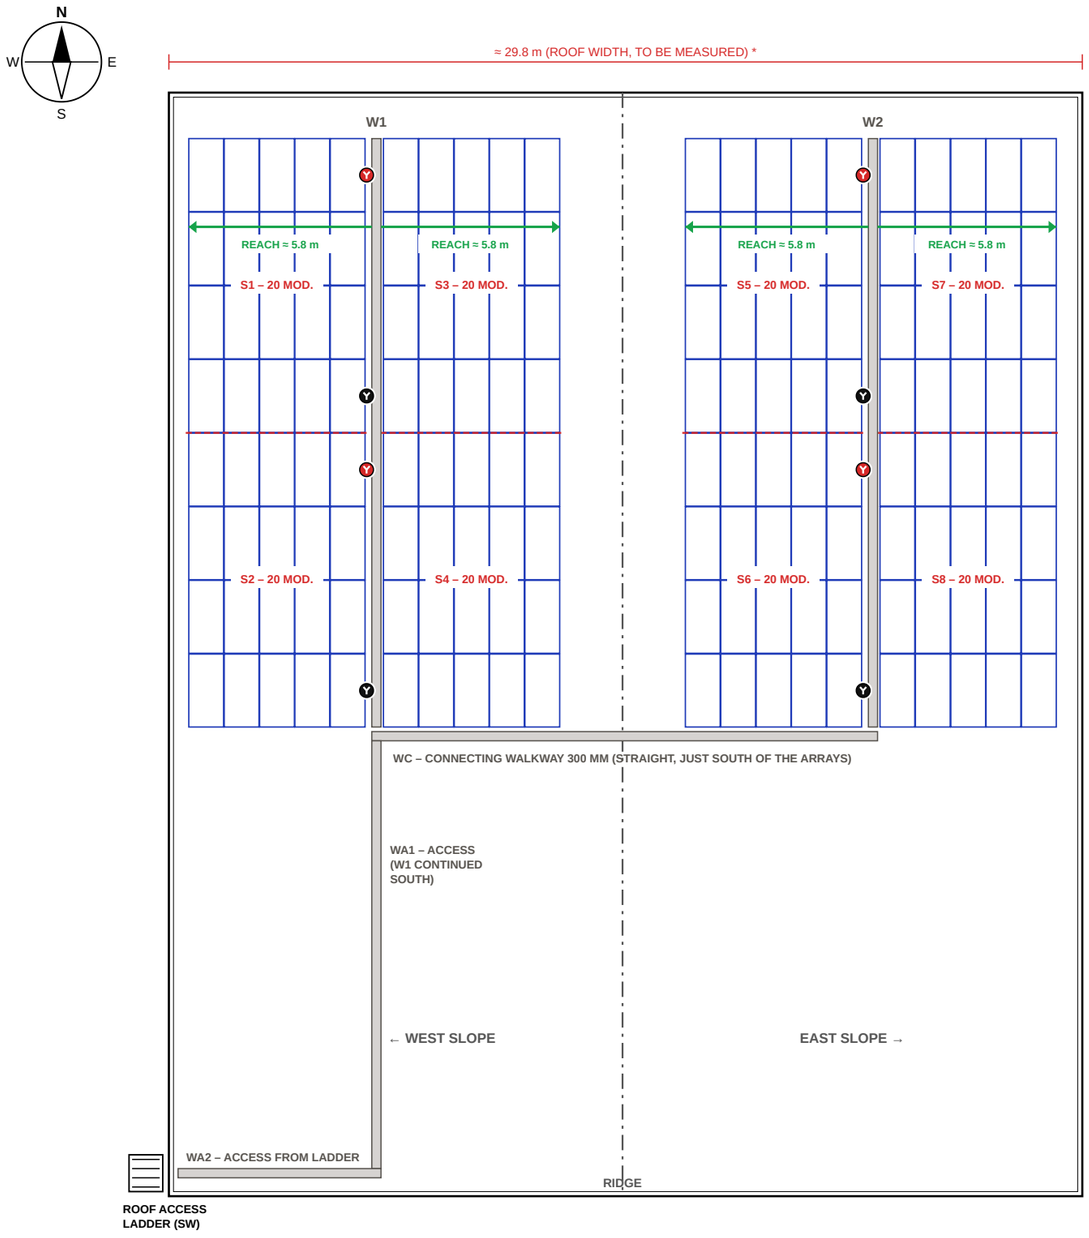

WALKWAY SCHEDULE

ID	LOCATION	WIDTH	LENGTH
W1	WEST SLOPE: GAP BLOCK 1 / 2 (BESIDE T1)	300 MM	19.2 m
W2	EAST SLOPE: GAP BLOCK 3 / 4 (BESIDE T2)	300 MM	19.2 m
WC	CONNECTOR, SOUTH OF ARRAYS, W1 → W2	300 MM	16.5 m
WA1	ACCESS: W1 CONTINUED SOUTH *	300 MM	14.0 m
WA2	ACCESS: SOUTH EDGE, LADDER → WA1 *	300 MM	6.6 m
	TOTAL 300 MM WALKWAY		75.5 m
	ORDER (+5 %)		79 m

SECTION A-A (BLOCK 1 | W1 | BLOCK 2)



5 MODULES | W1 | 5 MODULES

WALKWAY NOTES

1. FRP / HDG STEEL ANTI-SKID GRATING, UV STABILISED, MIN. 150 KG/M² RATED.
2. FIX TO PURLINS WITH CLAMPS — NO SHEET PUNCTURE, OR SEAL WITH EPDM WASHERS.
3. ≥ 50 MM CLEAR OF MODULE FRAMES; NO SHADING.
4. WA2 RUNS ALONG THE SOUTH EAVE AND THE LADDER LANDING — LIFELINE / HANDRAIL THERE ONLY.
5. NO TRAY CROSSINGS: TRAYS RUN NORTH, WALKWAY CONNECTOR AND ACCESS RUN SOUTH (SHEET L-03).
6. IF GAP 1/2 OR 3/4 MEASURES < 0.5 m, MOUNT THE TRAY BENEATH THE WALKWAY.
7. OUTER MODULE COLUMNS (≈ 5.8 m AWAY): INSPECTION / REPLACEMENT FROM A CRAWL BOARD ON PURLIN LINES.
8. Y-CONNECTORS (◉) SIT BESIDE THE TRAY IN THE GAPS: FAR-STRING LEADS RUN UNDER THE GRATING IN UV CLIPS — CHECK THEM AT EVERY CLEANING ROUND.

NOTE: ONE WALKWAY PER SLOPE (IN THE GAP BETWEEN ITS TWO BLOCKS) + ONE STRAIGHT CONNECTOR JUST SOUTH OF THE ARRAYS, REACHED FROM THE SW LADDER. FARTHEST MODULE ≈ 5.8 m FROM THE WALKWAY — CLEAN WITH A 6–7 m WATER-FED TELESCOPIC POLE. W1 / W2 RUN PARALLEL TO THE RIDGE, SO THEY ARE LEVEL. THE Y-CONNECTORS SIT IN THE SAME GAPS (ROWS 1, 4, 5, 8): THEIR LEADS PASS UNDER THE GRATING, CLIPPED — NEVER LOOSE ON THE WALKING SURFACE. ROOF SIZE / GAPS SCALED FROM THE LAYOUT IMAGE (*) — VERIFY ON SITE.

LEGENDS

	SOLAR MODULES
	WALKWAY 300 MM (W1, W2)
	CONNECTOR / ACCESS 300 MM (WC, WA1, WA2)
	CLEANING REACH
Y Y	Y-CONNECTOR POSITION (SEE L-01)
	ROOF ACCESS LADDER
	ROOF RIDGE

SYSTEM DESCRIPTION

SITE LOCATION	— (LAT, LONG TO BE ADDED)
DC CAPACITY	100.00 kWp
TOTAL PLANT CAPACITY (AC)	80 kW
DC / AC RATIO	1.25
MODULE CAPACITY	625 Wp (ADANI N-TOPCon)
MODULE DIMENSION (L X W X H)	2382 X 1134 X 30 mm *
TOTAL PV MODULES	160 Nos.
INVERTER CAPACITY	80 kW (GOODWE GW80K-MT) 1 No.
AZIMUTH / TILT	EAST-WEST (90° / 270°), ROOF SLOPE

CUSTOMER SIGN AND STAMP:

REV.	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
R0	29-10-26	FIRST ISSUE			

CLIENT: **JAIN GRANITE & MARBLE**

EPC CONTRACTOR: **NRG TECHNOLOGISTS PVT LTD**
989/6, GIDC Makarpura, Vadodara

DESIGN BY: **NRG TECHNOLOGISTS PVT LTD**
989/6, GIDC Makarpura, Vadodara

DRAWING NO.: L-02

DRAWING NAME: **WALKWAY LAYOUT (MODULE CLEANING)**

PROJECT TITLE: 100.00 kWp (DC)_ROOFTOP SOLAR PLANT

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ REVISION ☐ FABRICATION ☐ CONSTRUCTION ■ APPROVAL

SCALE: **1:200 (A3)**

DESIGN BY	DRAWN BY	CHECKED BY	APPROVED BY	PAPER SIZE	SHEET NO.
29-10-26	29-10-26	29-10-26	29-10-26	**A3**	**02 OF 03**