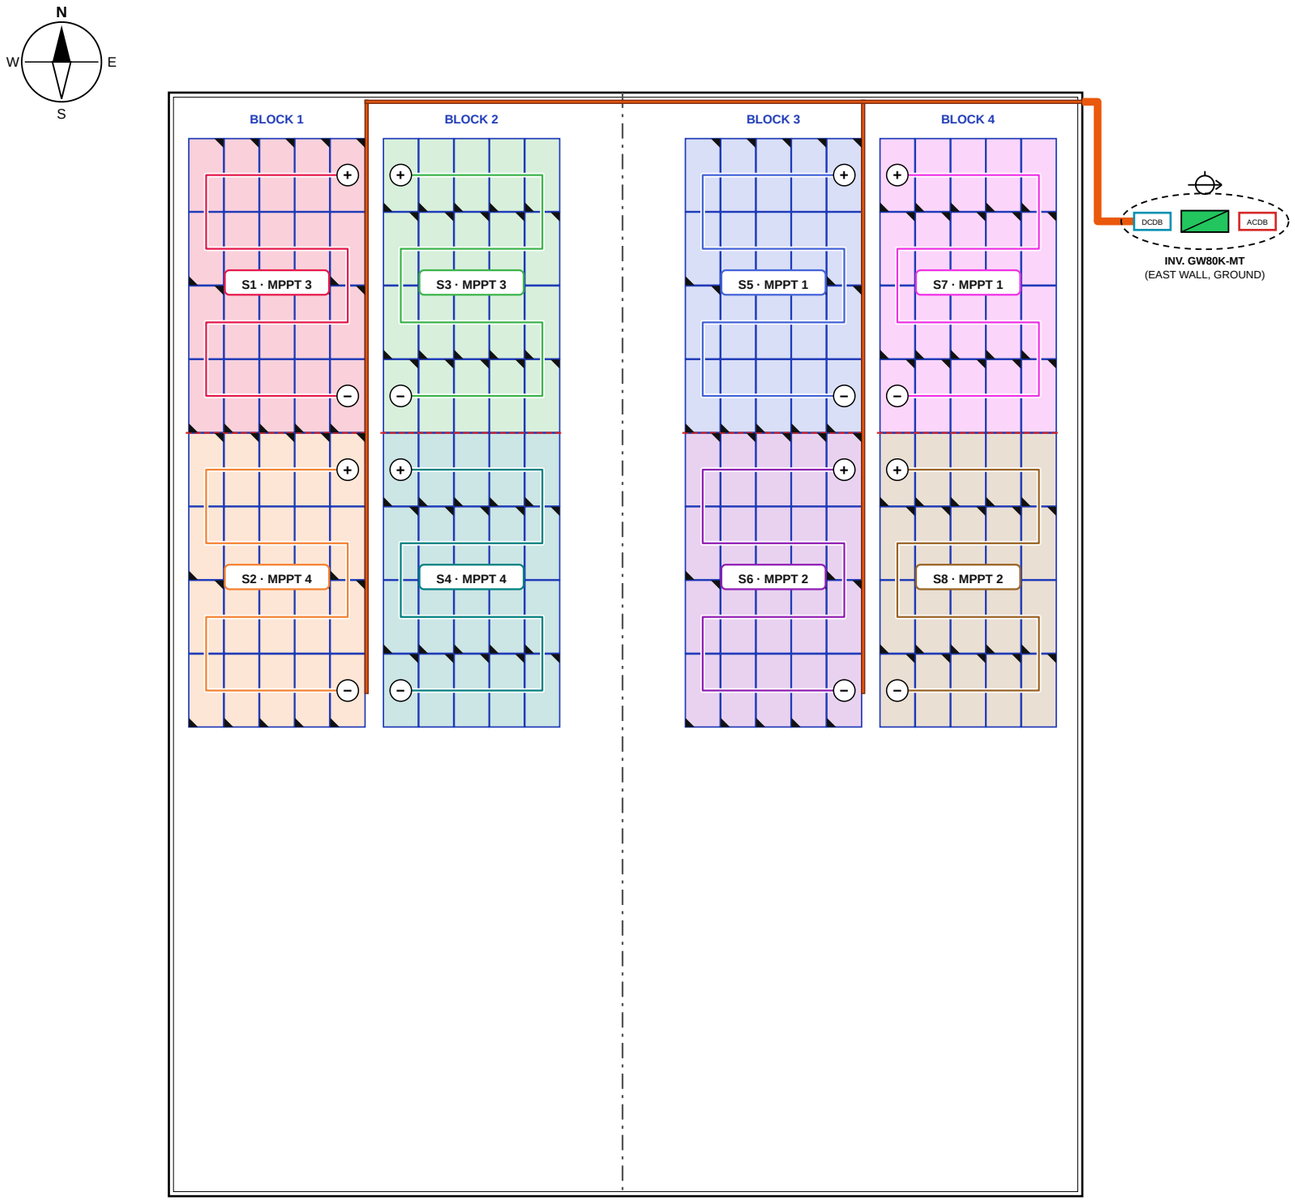


DC HOME-RUN SCHEDULE (4 SQ MM)


STRING	MPPT / IN	SLOPE	+VE (RED)	–VE (BLACK)	PAIR
S1	3 / 1	WEST	42.1 m	49.3 m	91.5 m
S2	4 / 1	WEST	51.7 m	59.0 m	110.7 m
S3	3 / 2	WEST	42.1 m	49.3 m	91.5 m
S4	4 / 2	WEST	51.7 m	59.0 m	110.7 m
S5	1 / 1	EAST	25.9 m	33.1 m	59.1 m
S6	2 / 1	EAST	35.5 m	42.8 m	78.3 m
S7	1 / 2	EAST	25.9 m	33.1 m	59.1 m
S8	2 / 2	EAST	35.5 m	42.8 m	78.3 m
TOTAL			311 m	368 m	679 m

EACH RUN = TRAY ROUTE + 1.0 m ARRAY-END TAIL + 1.5 m AT INVERTER.
ORDER QUANTITY (+5 %) IN THE BOM.

STRING DESIGN CHECK

MODULES / STRING	20 (ADANI 625 Wp N-TOPCon)
Voc @ 5 °C	20 x 52.3 = 1,046 V < 1,100 V ✓
Vmp RANGE	723 – 880 V (MPPT 200 – 1,000 V) ✓
CURRENT / MPPT	2 STRINGS: 30.1 A ≤ 44 A ; Isc 31.9 ≤ 55 A ✓
V-DROP (4 SQ MM)	0.52 – 1.03 % ✓
STRING FUSE	NOT REQUIRED (2 STRINGS / MPPT)

DETAIL — LAYING S1 (BLOCK 1): ADANI LABEL CORNER

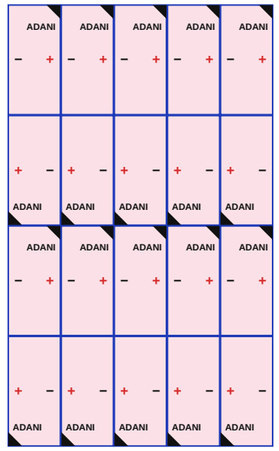

◥ / ◣ = ADANI LABEL CORNER. IN EVERY ROW THE LABEL SITS ON THE MODULE'S + SIDE, SO THE LABEL CORNER ALTERNATES ROW BY ROW: AS DELIVERED (NE) / ROTATED 180° (SW). CHECK THE FIRST MODULE: IF ITS + LEAD IS NOT ON THE LABEL SIDE, SWAP NE ↔ SW ON EVERY ROW — THE ALTERNATION STAYS THE SAME.

NOTE: OWNER'S MIRRORED SNAKE — EACH STRING SNAKES ACROSS ITS 4 ROWS SO + AND − SIT ON THE EDGE FACING ITS PARTNER BLOCK; THE PARTNER IS ITS MIRROR, SO + IS BESIDE + AND − BESIDE − ACROSS THE GAP. NO Y-CONNECTORS: EVERY STRING HAS ITS OWN 4 SQ MM +/− HOME RUN IN TRAYS T1 / T2 → NORTH EDGE → EAST WALL → INVERTER. EAST AND WEST NEVER SHARE AN MPPT. LENGTHS SCALED FROM THE LAYOUT IMAGE (*) — VERIFY ON SITE.

LEGENDS

	MODULE (TINT = STRING)
	ADANI LABEL CORNER (NE / SW = ROTATED 180°)
	STRING WIRING ORDER
+ −	STRING + / − TERMINAL
	DC CABLE TRAY 100 x 50 MM
	ROOF RIDGE
	STRING INVERTER

SYSTEM DESCRIPTION

SITE LOCATION	— (LAT, LONG TO BE ADDED)
DC CAPACITY	100.00 kWp
TOTAL PLANT CAPACITY (AC)	80 kW
DC / AC RATIO	1.25
MODULE CAPACITY	625 Wp (ADANI N-TOPCon)
MODULE DIMENSION (L X W X H)	2382 X 1134 X 30 mm *
TOTAL PV MODULES	160 Nos.
INVERTER CAPACITY	80 kW (GOODWE GW80K-MT) 1 No.
AZIMUTH / TILT	EAST-WEST (90° / 270°), ROOF SLOPE

CUSTOMER SIGN AND STAMP:

REV.	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
R0	27-10-26	FIRST ISSUE			

CLIENT:	**JAIN GRANITE & MARBLE**
EPC CONTRACTOR:	**NRG TECHNOLOGISTS PVT LTD** 989/6, GIDC Makarpura, Vadodara
DESIGN BY:	**NRG TECHNOLOGISTS PVT LTD** 989/6, GIDC Makarpura, Vadodara

DRAWING NO.: 06

DRAWING NAME: **STRINGING LAYOUT**

PROJECT TITLE: 100.00 kWp (DC)_ROOFTOP SOLAR PLANT

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ REVISION ☐ FABRICATION ☐ CONSTRUCTION ■ APPROVAL

SCALE: **1:200 (A3)**

DESIGN BY	DRAWN BY	CHECKED BY	APPROVED BY	PAPER SIZE	SHEET NO.
27-10-26	27-10-26	27-10-26	27-10-26	**A3**	**01 OF 01**